

## Electronic Supplementary Information

### Efficient Perovskite Nanocrystal Light-Emitting Diodes Using Benzimidazole-Substituted Anthracene Derivative as the Electron Transport Material


Sudhir Kumar,<sup>a</sup> Marcato Tommaso,<sup>a</sup> Serhii I. Vasylevskyi,<sup>b</sup> Jakub Jagielski,<sup>a</sup>

Katharina M. Fromm,<sup>b\*</sup> Chih-Jen Shih<sup>a\*</sup>


<sup>a</sup> Institute for Chemical and Bioengineering, Department of Chemistry and Applied Biosciences, ETH Zurich, Vladimir-Prelog-Weg 1–5/10, CH-8093 Zurich, Switzerland

<sup>b</sup> Department of Chemistry, University of Fribourg, Ch. du Musée 9, 1700 Fribourg CH-1700 Fribourg, Switzerland


\*Email: [katharina.fromm@unifr.ch](mailto:katharina.fromm@unifr.ch) (KMF) and [chih-jen.shih@chem.ethz.ch](mailto:chih-jen.shih@chem.ethz.ch) (CJS)

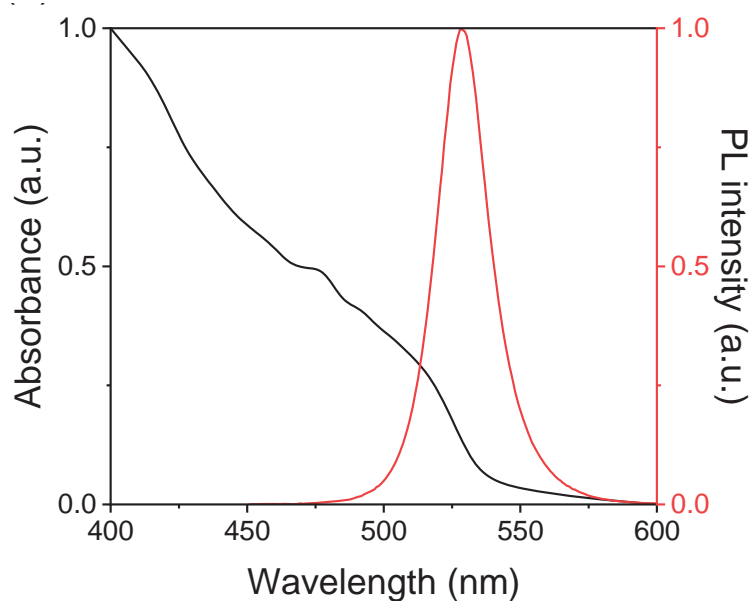


**Figure S1.** Photoluminescence and absorption spectra of colloidal FA<sub>0.5</sub>MA<sub>0.5</sub>PbBr<sub>3</sub> perovskite nanocrystals.

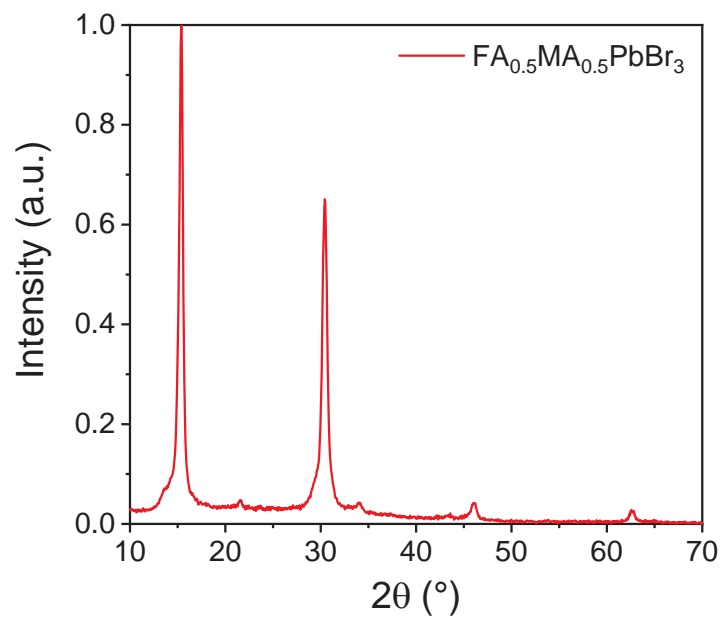


**Figure S2.** XRD pattern of colloidal  $\text{FA}_{0.5}\text{MA}_{0.5}\text{PbBr}_3$  perovskite nanocrystals.

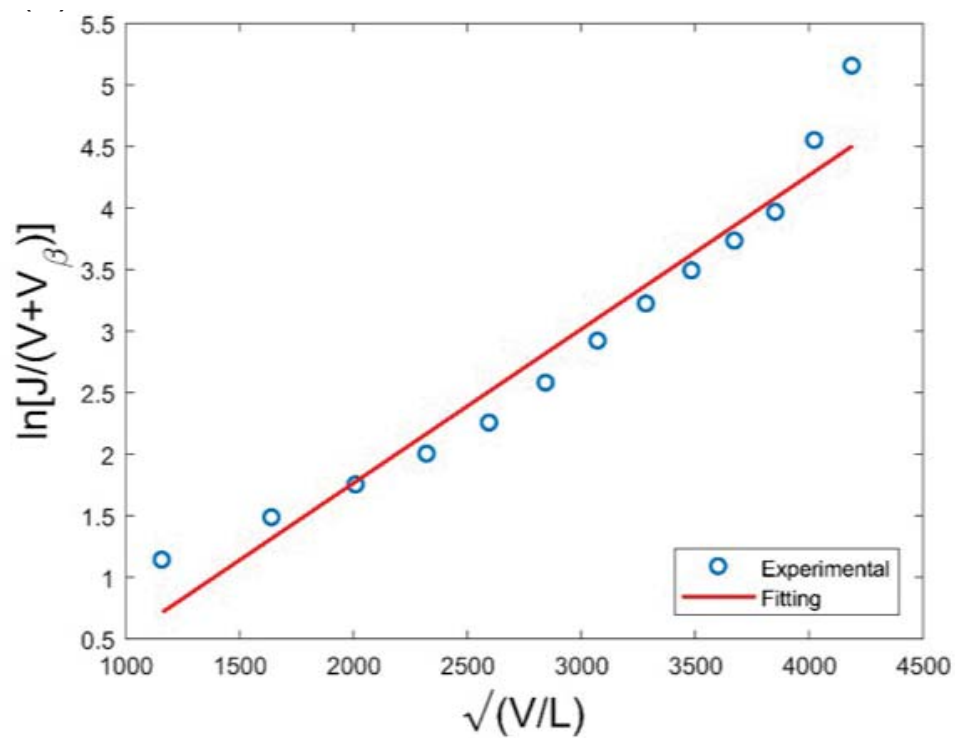


**Figure S3.** (a)  $J$ - $V$  experimental data with axes transformed according to modified Poole-Frenkel equation and fitting of the model used to extract electron mobility. Estimated zero field mobility  $\mu_0 = 8.11 \times 10^{-6} \text{ cm}^2\text{V}^{-1} \text{ s}^{-1}$ .

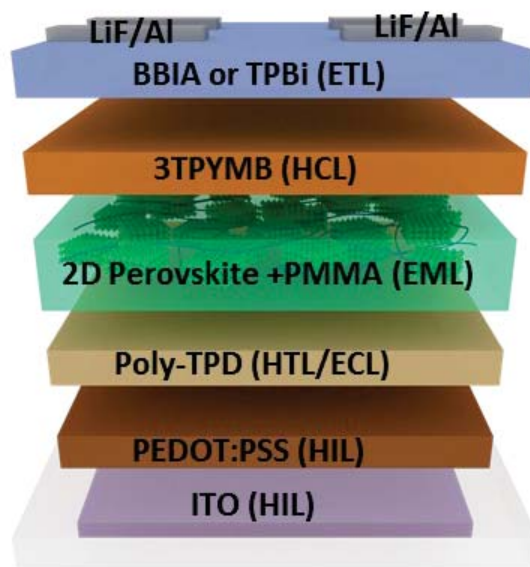

**Figure S4.** Schematic device architecture of devices with **BBIA** and TPBi electron transporting materials.

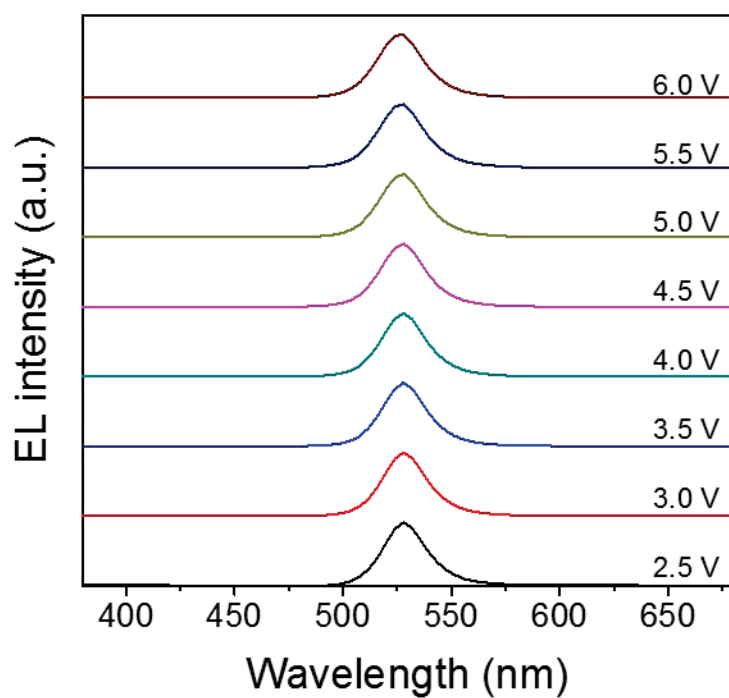


**Figure S5.** EL spectra of devices at different operating voltages ranging between 2.5 to 6 V.

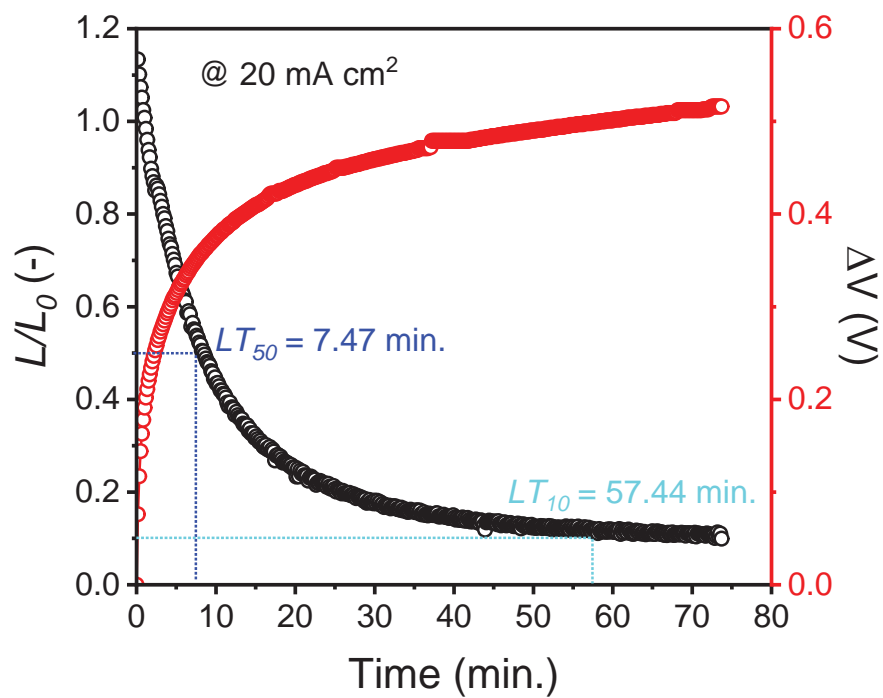


**Figure S6.** Lifetime of PeLED based on conventional electron transporting material, TPBi. Relative luminance and driving voltage change as a function of time under continuous electrical stress at a constant current density of 20 mA cm<sup>-2</sup>.



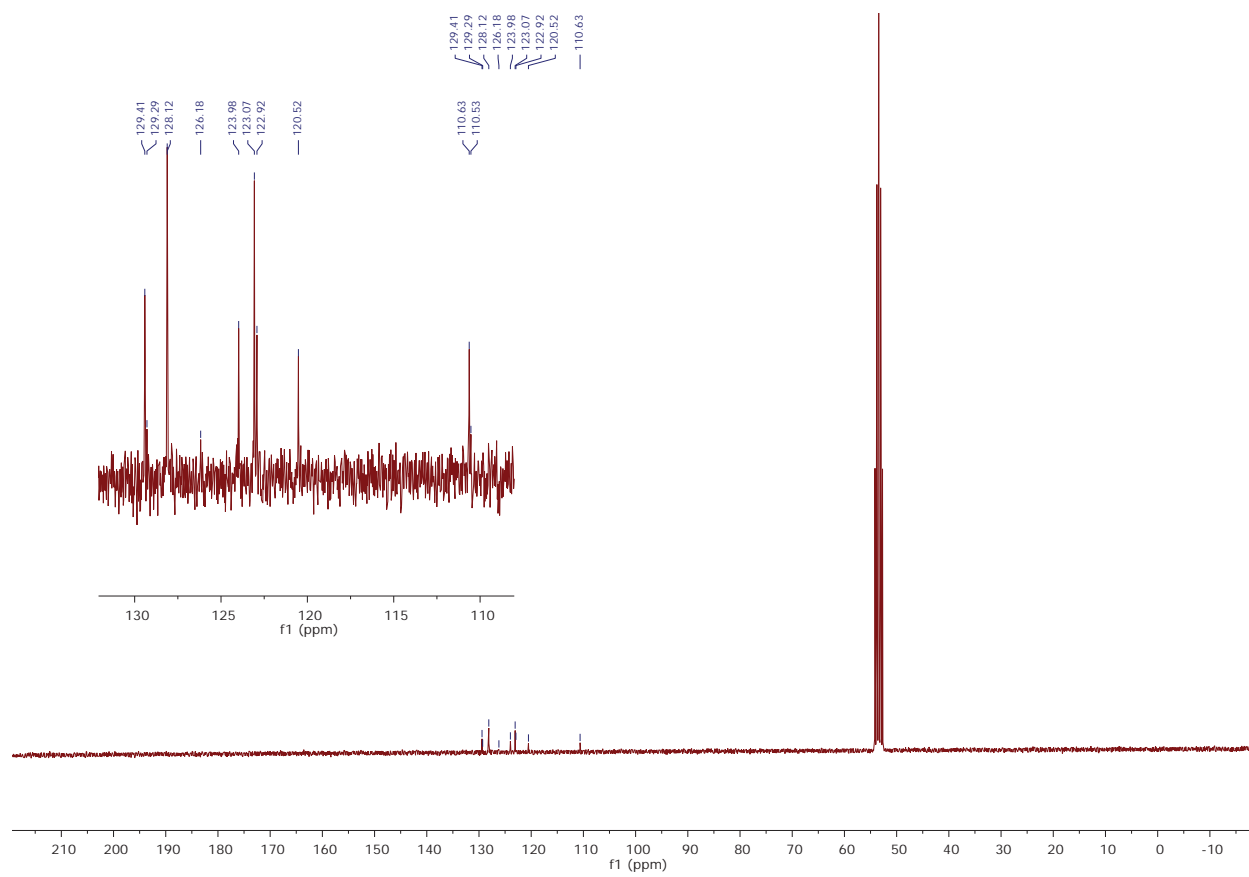

**Figure S8.**  $^{13}\text{C}$ -NMR spectrum of BBIA in  $d_2$ -DCM. (inset: zoomed region of BBIA peaks)

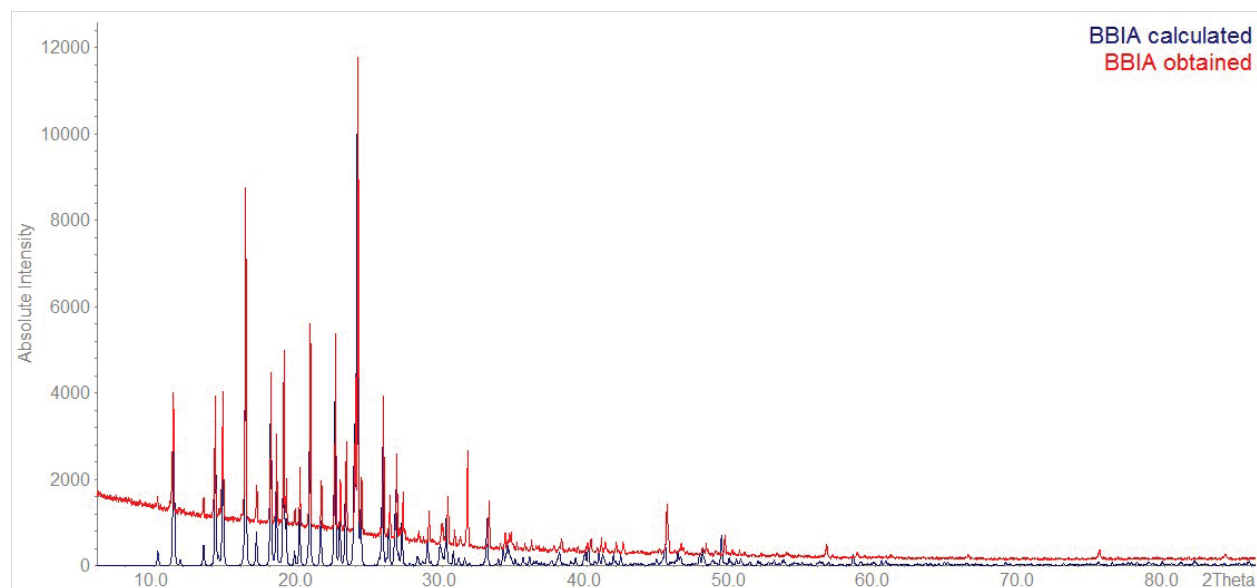

**Figure S9.** PXRD of BBIA sample as synthesized fitting with calculated powder pattern from single crystal of BBIA CCDC 635086.<sup>1</sup> (Cu-irradiation  $\lambda = 1.54060 \text{ \AA}$ , collected in a STOE STADI P).

## References

1. L. Li, T.-L. Hu, J.-R. Li, D.-Z. Wang, Y.-F. Zeng and X.-H. Bu, *CrystEngComm*, 2007, **9**, 412-420.